



Perbadanan Harta Intelek Malaysia
Intellectual Property Corporation of Malaysia

Aras 27, 30 dan 32, Menara Dayabumi, Jalan Sultan Hishammuddin, 50623 Kuala Lumpur, Malaysia.
Tel: 603-2274 2100 Fax: 603-2274 1332 Website: www.mipc.gov.my

PCT/GB 2004 / 0 0 4 1 5 1
08 NOVEMBER 2004

GB04/4151

To:

Mr. Wong Sai Fong
Shearn Delamore & Co.
7th Floor, Wisma Hamzah-Kwong Hing,
No. 1, Leboh Ampang,
50100 Kuala Lumpur,
MALAYSIA.

REC'D 03 DEC 2004

WIPO PCT

PATENT APPLICATION NO: PI 2003 3725

This is to certify that annexed hereto is a true copy from the records of the Registry of Trade Marks and Patents, Malaysia of the application as originally filed which is identified therein.


By authority of the
REGISTRAR OF PATENTS


ROZANAH MISKAN
(CERTIFYING OFFICER)
20-Oct-2004
rozanah@mipc.gov.my
Tel: 03-22748970

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17 OF THE

BEST AVAILABLE COPY

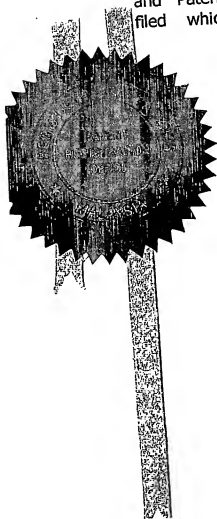



Perbadanan Harta Intelek Malaysia
Intellectual Property Corporation of Malaysia


Aras 27, 30 dan 32, Menara Dayabumi, Jalan Sultan Hishamuddin, 50623 Kuala Lumpur, Malaysia
Tel : 603-2274 2100 Fax : 603-2274 1332 Website : www.mipc.gov.my

CERTIFICATE OF FILING

APPLICANT : BRITISH TELECOMMUNICATIONS PUBLIC
LIMITED COMPANY
APPLICATION NO : PI 20033725
REQUEST RECEIVED ON : 30/09/2003
FILING DATE : 30/09/2003
AGENT'S/APPLICANT'S FILE REF. : SD/PAT/2602340/TS/JL

Please find attached, a copy of the Request Form relating to the above application, with the filing date and application number marked thereon in accordance with Regulation 25(1).

Date : 06/10/2003


(MOHD. AMRAN ABAS)
for Registrar of Patents

To : TIMOTHY SIAW YEAN HWA
C/O SHEARN DELAMORE & CO.
7th FLOOR, WISMA HAMZAH-KWONG HING,
NO.1, LEBOH AMPANG
50100-KUALA LUMPUR
MALAYSIA

Patents Form 1
PATENTS ACT 1983

**REQUEST FOR
GRANT OF PATENT**
[Regulation 7(1)]

To: The Registrar of Patents
Patent Registration Office
Kuala Lumpur, Malaysia

*Please submit this Form in duplicate together
with the prescribed fee.*

FOR OFFICIAL USE

Application No. P1 20033725
Filing date: 20-09-2003
Request received on: 20-09-2003
Fee received on: 20-09-2003
Amount: RM 330
Cheque No. PUS 334872

Applicant or Agent's file reference:
SD/PAT/2602340/TS/j1

**THE APPLICANT(S) REQUEST(S) THE GRANT OF A PATENT IN RESPECT OF THE
FOLLOWING PARTICULARS.**

I. TITLE OF INVENTION

WEB CONTENT ADAPTATION PROCESS AND SYSTEM

II. APPLICANT(S)
*(The data concerning each applicant must appear in this box or, if the space is insufficient,
in the space below)*

Name : **BRITISH TELECOMMUNICATIONS PUBLIC LIMITED
COMPANY**

H.S.C./Passport no. :

Address : **81 NEWGATE STREET,
LONDON EC1A 7AJ,
UNITED KINGDOM**

Address for service in Malaysia:

SHEARN DELAMORE & CO.
Advocates & Solicitors, Notary Public, Registered Patent Agents, Trade Mark Agents & Industrial Design Agents
7th Floor, Wisma Hamzah-Kwong Hing, No.1, Leboh Ampang, Kuala Lumpur
Telephone: 03-20700644; Facsimile: +60-3-20782376


Nationality : **A Company Organised and Existing under the Laws of
United Kingdom**

*Permanent residence or
principal place of business:

-SAME AS ABOVE-

Additional Information

*Delete whichever does not apply



20033725

III. INVENTOR(S)

The Applicant(s) is/are the inventor(s):

Yes ☐

No ☒

If the Applicant(s) is/are not the inventor(s):

Name _____

Address _____

1. CHUA, Hui Na
[Malaysian citizen]

BT Multimedia (M) Sdn Bhd
CyberView Lodge Office Complex
MSC HeadQuarters, Jasmin Block, Suite A
63000 Cyberjaya
Selangor Darul Ehsan
MALAYSIA

2. NG, See Leng
[Malaysian citizen]

-same as above-

3. SCOTT, Simon
[British citizen]

-same as above-

A statement justifying the applicant's right to the patent

Accompanies this form:

Yes

☒

No

☐

Additional information

20033725

30 SEP 2003

IV. AGENT OR REPRESENTATIVE

The Applicant(s) has/have appointed a patent agent in the accompanying Form 17 [will follow] Yes ☒ No ☐
 Patent Agent's Registration number: PA 86/0003 and/or PA 92/0032

Applicants have appointed to be their common representative.

V. DIVISIONAL APPLICATION

This application is a divisional application: ☐
 The benefit of the filing date ☐ and priority date ☐ of the initial application is claimed inasmuch as the subject matter of the present application is contained in the initial application identified below:

Initial Application number:
 Date of filing of initial application:

VI. DISCLOSURES TO BE DISREGARDED FOR PRIOR ART PURPOSES

Additional information is contained in supplemental box:

- (a) Disclosure was due to acts of the applicant or his predecessor-in-title ☐
 Date of disclosure:
 (b) Disclosure was due to the abuse of rights of applicant or his predecessor-in-title ☐
 Date of disclosure:

A statement specifying in more detail the facts concerning the disclosure Yes ☐
 Accompanies this Form No ☐

Additional information (if any)

VII. PRIORITY CLAIM (if any)

The priority of earlier applicant(s) is/are claimed as follows:-

Country* Application no. Filing date (dd/mm/yy)

Symbol of the International Patent Classification:

If not yet allocated, please tick

The priority of more than one earlier application is claimed: Yes ☐ No ☐

The certified copy of the earlier application(s) accompanies this form: Yes ☐ No ☐

If No, it will be furnished upon request.

*if the earlier application is a regional or international application, indicate the office with which it is filed

Additional information (if any)

VII. CHECK LIST


A. This application contains the following:

1.	Request (Form 1)	04	sheets
2.	description	32	sheets
3.	claim(s)	04	sheets
4.	abstract	01	sheets
5.	drawings (if any)	08	sheets
TOTAL		49	

B. This Form, as filed, is accompanied by the items checked below:

- a. signed Form No. 17 [will follow] ☒
- b. declaration that inventor does not wish to be named in the patent ☐
- c. statement justifying applicant's right to the patent ☒
- d. statement that certain disclosure be disregarded ☐
- e. priority document (certified copy of earlier application) ☐
- f. cheque, cash, etc. for the payment of application fee ☒
- g. other documents (specify) ☐

IX. SIGNATURE



30 September 2003

.....
 Name: **TIMOTHY SIAW**
 Regn No.: **PA 92/0032**

.....
 date

For official use:

1. Date application received:
2. Date of receipt of
 correction,
 later filed papers, or
 drawings
 completing the application.

20033725

30 SEP 2003

Web Content Adaptation Process and System

Technical Field

The present invention relates to an apparatus and method for adapting web page content for display on an intended display device, by splitting the content into a plurality of smaller web pages.

Background to the Invention and Prior Art

To deliver web content to different devices is a process of understanding, restructuring and tailoring the content in such a way that the content source can be understood and delivered to different devices (such as desktop PCs, PDAs, and mobiles phones) in a manner which suits the device characteristics. Within the prior art (see for example Current Technologies for Device Independent, Mark H Butler, HP Labs Technical Report HPL-2001-83 4 April 2001), there are three presently known ways of doing it:

Firstly, web developers/authors can use web page development software to tailor the content manually to suit different devices, at the web content development stage. By doing this, different versions (e.g. HTML/CSS, WML, XML/XSL) of a single source can be created based on the device capabilities. This approach is the primitive way to deliver web content to different devices, and is a time-consuming and tedious task for web developers/authors if a large number of versions are required.

A second more automated approach is to use a proxy-based trans-coding approach through a proxy server which does the adaptation work on the fly when an end user submits an URI link through a HTTP request. This approach is computing intensive at the proxy server, and has the result that the system response time is slowed. Furthermore, there is no intervention of the original web developers/authors to the adapted web content, which may raise legal and copyright issues in some countries.

A third known technique is to use a client-based (end user device) adaptation approach by installing the adaptation system software at the client side. The client-based adaptation system will adapt the web content on the fly after it receives the result sent back by the requested web server. This approach is computing intensive at the client side, which will consume and degrade the client processing performance. Again, there is no intervention of the original web developers/authors to the adapted web content, which might raise legal and copyright issues as well. Furthermore, this approach is not possible to be applied in small mobile devices due to computation power limitations.

- As part of the adaptation, it may be necessary to split a page of web content into a plurality of smaller pages (known as content splitting), in view of the small size of client display devices such as PDAs and WAP phones. For example, to render the contents of a PC web-page (e.g. 800x600 pixels) to a smaller display (for example a PDA with 240x320 pixels) in a readable form, it is desirable to adapt the content to fit into the fewest number of smaller pages whilst also trying to minimize the amount of white space.

Prior known methods for content splitting include those described in US Patent Application No. 09/942,051 (published as US 2003/0050931 A1), entitled "System, Method and Computer Program Product for Page Rendering Utilizing Transcoding"

- This document describes a system which is able to adapt web content for display on different viewing devices by splitting the content into multiple pages. The system firstly uses the web content to construct a hierarchical tree structure using XML, which is then formatted for display on the device (eg by changing to a text font which is supported by the viewing device, and replacing redundant information with references to variables). The formatted structure is then split into multiple pages for output to the viewing device. However, whilst such an approach achieves the objective of splitting the content to fit the client display device, it does not satisfy the desirable objective of minimizing the amount of white space.

- In view of the above, there is a need for a further approach which adapts web page content for display on an intended display device which does not possess the disadvantages of the prior art, and in particular with regards to attempting to minimize the amount of white space which will be displayed with the content.

Summary of the Invention

- In order to meet the above, the present invention provides an apparatus and method for adapting web page content for display on an intended device. Here, an integrated process of splitting combined with transformations are provided in an iterative manner to adapt the content display size. Thus allowing the content to be split into a suitable number of smaller web pages whilst keeping to a minimum the amount of white space that will be shown on the pages. In this context it is understood that the term "transformation" can include, for example, reducing / increasing the size of images / text, removal / replacement of content, etc.

According to a first aspect of the present invention, there is provided an apparatus for adapting web page content for display on an intended display device, comprising

adaptation means for splitting the content into a plurality of smaller web pages for display on said device, the adaptation means being arranged in use to:

(i) split the content into a plurality of content portions, and to iteratively repeat steps (ii) to (vi) for at least one of the content portions:

5 (ii) analyse the content to determine whether the size of the content portion is suitable for display on said device;

(iii) if the size of the content portion is not suitable for display on said device, then apply a plurality of transformations to the content portion;

(iv) analyse the transformed content to determine whether the size of the
10 transformed content portion is suitable for display on said device; and

(vi) if the size of the transformed content portion is not suitable for display on said device then split the content portion into a plurality of further content portions.

According to a second aspect of the present invention, there is provided a method
15 for adapting web page content for display on an intended display device, comprising splitting the content into a plurality of smaller web pages for display on said device by performing the following steps:

(i) splitting the content into a plurality of content portions, and iteratively repeating steps (ii) to (vi) for at least one of the content portions:

20 (ii) analysing the content to determine whether the size of the content portion is suitable for display on said device;

(iii) if the size of the content portion is not suitable for display on said device, then applying at least one content transformation to the content portion;

(iv) analysing the transformed content to determine whether the size of the
25 transformed content portion is suitable for display on said device; and

(vi) if the size of the transformed content portion is not suitable for display on said device then splitting the content portion into a plurality of further content portions.

According to a third aspect of the present invention, there is provided a computer
30 program or suite of programs so arranged such that when executed by a computer system it/they cause/s the system to perform the method above. The computer program or programs may be embodied by a modulated carrier signal incorporating data corresponding to the computer program or at least one of the suite of programs, for example a signal being carried over a network such as the Internet.

35

Additionally, from a yet further aspect the invention also provides a computer readable storage medium storing a computer program or at least one of suite of computer programs according to the third aspect. The computer readable storage medium may be any magnetic, optical, magneto-optical, solid-state, or other storage medium capable of
5 being read by a computer.

Brief Description of the Drawings

Further features and advantages of the present invention will become apparent from the following description of an embodiment thereof, presented by way of example only,
10 and by reference to the accompanying drawings, wherein like reference numerals refer to like parts, and wherein:

Figure 1 is a system block diagram illustrating the components of the embodiment of the invention, and the signal flows therebetween;

Figure 2 is a process flow diagram illustrating in more detail how information flows
15 between the components of the embodiment of the invention in operation;

Figure 3 is a flow diagram for an algorithm to detect characteristics of display objects in web content within the embodiment of the invention;

Figure 4 is a decision tree to detect the functions of display objects in web content within the embodiment of the invention;

Figure 5 is a flow diagram illustrating how content transformations can be applied
20 in the embodiment of the invention; and

Figure 6 is a flow diagram illustrating how the process of content splitting is performed in the embodiment of the invention.

25 Description of the Embodiment

An embodiment of the present invention will now be described with reference to Figures 1 to 6.

Figure 1 is a system block diagram of the system provided by the embodiment of the invention. This system consists of 8 sub-components, as described next. The full
30 operation of the system will be described later.

Firstly there is provided the client capability discovery module 12. The purpose of this module is to discover the end user's device characteristics e.g. type of devices and their capabilities such as screen size/resolution supported, processing power etc., and as such this module receives information from the end user display device relating to its capabilities.

The client capability discovery module 12 passes the end user's device information to the Decision Module 14.

The Decision module 14 contains existing Client Capabilities profile Ids which were previously detected or predefined by the adaptation system. Client Capabilities profile Ids are sets of information relating to display device display characteristics. In use the Decision module 14 first compares an end user's device characteristics and capabilities (CC) range based on the information sent by Discovery Module with the existing capability profiles. If the client capabilities match an existing profile, then the profile Id of the matching profile is sent to a content Cache 10, in which is stored different versions of pre-generated adapted web content. If the received CC set does not match an existing CC range (i.e. there is no existing CC profile which matches the present requesting device capabilities) then the Adaptation module 16 will be triggered. Additionally, the adaptation module 16 may also be triggered manually to generate different versions of the original web content, without there being a specific request from an end-user.

Howsoever the adaptation module 16 is triggered, the module 16 then acts to examine the http header of the requested web content, and further acts to control a content analysis module 20 to retrieve the requested web content from a web content source store 22. The content analysis module 20 then acts to analyse the indicated web content from the content source store 22, and passes back to the adaptation module 16 a range of parameters relating to the characteristics of the web content as input values to the adaptation module 16. The input parameters received at the adaptation module 16 from the content analysis module 20 enable the adaptation module 16 to adapt the requested web content from the original web content stored in the web contents store 22. The output of the adaptation module 16 is therefore an adapted version of the originally requested web content, and this is sent in an appropriate mark up language such as html to a content cache 10 together with a set of client capability (cc) information, being a set of one or more characteristics of the display of the device requesting the web content. Such display characteristic information was determined by the client capability discovery module 12, as previously described.

In addition to the modules mentioned above, there is also provided, as previously mentioned, a content cache 10 which acts to store different adapted versions of the original web content. In some embodiments, the cache 10 may also store client capability characteristics, being the set of information relating to the display characteristics of different client display device. Also provided is the content source 22, in which the original web content to be adapted is stored, and a content tidy module 18 which acts under the control

of the content analysis module 20 to tidy up the original web content received from the content source store 22 prior to the analysis thereof. Furthermore, a customisation module 24 is also provided which is merely a front end system providing previews of the adapted web content from the content cache. The customisation module 24 is an offline module 5 which allows the author to preview and further customise adapted content.

Having described the various system modules provided by the embodiment of the present invention, the operation of those modules will now be described in further detail with respect to Figures 2 to 6.

The apparatus provided by the present invention would most likely be embodied in 10 a computer system acting as a web server or the like. Alternatively, the apparatus can be embodied in a computer system, or the components (as shown in figure 1) can be embodied in separate computer systems but one computer system acts as a web server to other computer systems. However the apparatus is embodied, the computer system not only acts as a mere server, but also allows for the web content author to develop the web 15 content and review it thereon. Moreover, the system also acts to generate different versions of the original web content for different intended display devices. In view of these functions, there are three distinct modes of operation of the system: a first mode wherein it is acting to service user requests for web content, the request having been received over a network; a second mode wherein it acts to generate adapted versions of the web content for 20 different intended display devices in advance of the receipt requests from users for such web content; and a third mode wherein adaptation of web content to provide a further adapted version can be performed on the fly in response to a user request. Each of these modes of operation will now be described.

Dealing with the second of the above described modes of operation first, imagine 25 that the system is being used to generate different versions of original web content in advance of user requests therefor. For example, this mode could be used during website development to provide versions of an original source web content each especially adapted for different intended display devices, each with different display characteristics.

Therefore, when in this mode the first step to be performed is that a plurality of sets 30 of predefined intended display device display characteristic profiles are created, each set having a unique ID, and corresponding to a set of one or more display characteristics, each characteristic taking a range of values. For example, a first client capability profile set could have fields entitled *client_type*, *screen_resolution*, and *colour_depth*. A first profile ID CC1 would by way of example have the value "PC" in the *client_type* field, the value "800 x 600" 35 or "1024 x 768" in the *screen_resolution* field, and "16bits" in the *colour_depth* field. As a

further example, a further client profile set with the ID "CC2" could have the value "PDA" in the client_type field, the value "200 x 300" in the screen_resolution field, and the value "32bit" in the colour_depth field. It will be understood that the above are merely non limiting examples of the type of information which can contribute towards the profile sets and that a large number of different profiles can be easily created by forming a collection with different combinations of device characteristics and capabilities. Once created, the client capability profile sets are stored in a profile server 26, as shown in Figure 2. This is merely a database system which acts to physically store the device profiles. The profile server 26 is accessible by the decision module 14 in order to allow the decision module to compare requesting user display device characteristics with the stored client capability profile sets.

Having created a plurality of client capability profile sets each with a different combination of intended display device characteristics and values, in the mode of operation presently described the system acts to then generate an adapted version of the original source web content for each of the client capability profile sets stored in the profile server 26. This is performed by triggering the adaptation module 16 to adapt the original source web content to match each client capability profile set. The adaptation module 16 will usually be triggered separately for each client capability profile set, such that on any one triggering, a single adapted version of the web content corresponding to a single client capability profile set will be generated. The detailed operation of the adaptation module 16 upon triggering is given below.

The first step performed by the Adaptation Module 16 is to trigger the Content Analysis module 20, by passing to it details of the original source web content to be adapted. The Content Analysis module 20 then retrieves the original content source from the Content source store 22 (which stores all the web content source created by developers/authors), and passes the retrieved content source to the Content Tidying module 18 for conversion to an xHTML file. The function of the Content Tidying module 18 is to tidy up the structure of the mark-up language (web content) and convert it into xHTML structure format. xHTML format provides a neat and tidy structure for the Content Analysis module 20 to perform the analysis task. The Content Tidying module 18 can be provided by using 3rd party software such as TIDY, available at the priority date from <http://tidy.sourceforge.net/>. As such, no further details of the operation of the content tidying module 18 will be given here. The Content Tidying module 18 passes back the tidied xHTML file to the Content Analysis module 20.

Having received the tidied web content, the Content Analysis module 20 then performs the following tasks in sequential order:

i) calculates the total and individual pixels and characters of display objects in the web content;

ii) detects the functions of individual objects in the web content (normally they are the tags in a web page). For example, an object may possess a styling, structural or display tag;

iii) groups single objects based on their structural behaviour (information from object tag); and then

iv) matches the display object display patterns, and groups them together to form a group (performed using a Pattern Matching algorithm).

These four tasks are performed by respective dedicated algorithms, the details of which are given next.

Concerning the first task, the purpose of this is to calculate the pixels/size of display objects such as text, image and etc. The algorithm which performs this task will first detect the type of display object. The algorithm then applies different analysis logic for different type of display objects. For example, if the display object is a text object, then it gets the length, font style and size and calculate the pixels based on these input. If the display object is an image/applet/object, then the algorithm will calculate total pixels based on width and height of the object. For the rest of the display objects, the algorithm will calculate total pixels based on the width, height and/or width/height attributes set in the parameter of the object (if it is specified in the HTML content). The exact steps performed by this algorithm are shown in Figure 3, and described next.

Referring to Figure 3, the first step to be performed by the algorithm at step 3.2 is that it detects an individual display object within the tidied web content. Then, at step 3.4 an evaluation is made to determine whether or not the detected display object is text. If this evaluation returns positive, such that the detected display object is determined to be text, then at step 3.6 the length of every text string within the display object is obtained. Next, at step 3.8 a text tag is created for every string, and at step 3.10 the numbers of characters in the string determined at step 3.6 is set as an attribute of the text tag.

Next, at step 3.12 the font and style of every text string is determined, and then at step 3.14 the size of every text string is also determined. Using this information, at step 3.16 the height and width of the text string based on their font, style, and size attributes is calculated and these calculated height and width values are set as further attributes of the text tag for each string at step 3.18. The process for that particular display object which was determined to be text then ends at step 3.50, and the process starts once again at step

3.2 to detect the next display object in the web content. Once all of the display objects have been processed by the algorithm, then the algorithm is not repeated.

Returning to step 3.4, if it is determined herein that the detected display object is not text, then a second evaluation is performed at step 3.20 to determine whether the
 5 detected display object is an image, applet, or object. If this evaluation returns positive, i.e. that the display object is an image, applet, or object, then processing proceeds to step 3.22 wherein a further evaluation is performed to determine whether or not the width of the image, applet, or object is specified. If this is the case then processing proceeds to step 3.24. If this is not the case, then processing proceeds to step 3.28, wherein the original
 10 width of the object is determined, and thereafter processing also proceeds to step 3.24.

At step 3.24 a further evaluation is performed to determine whether or not the height of the detected image, applet or object is specified. If this evaluation returns positive then processing proceeds to step 3.26. On the contrary, if the evaluation of step 3.24 returns a negative, then processing proceeds to step 3.30 wherein the original height of the
 15 object is determined. Processing then proceeds from step 3.30 to step 3.26.

At step 3.26, the width and height attributes of the image, applet, or object as determined by the previously described steps are set as the width and height attributes of the object tag within the web content. Following this, the processing of that particular display object then ends at step 3.50. As before, if further objects need to be processed
 20 then processing begins again at step 3.2.

Returning to step 3.20, if the evaluation performed therein determines that the detected display object is not an image, applet, or object, then processing proceeds to step 3.32, wherein an evaluation is performed as to whether the width and height of the detected display object are specified. If this is the case, then processing proceeds to step 3.34
 25 wherein the specified width and height are set as parameters in the style attribute of each control tag for the detected display object. The processing then ends at step 3.50, and may be repeated if required as described previously.

If at step 3.32 it is instead determined that neither the width nor the height are specified, then processing proceeds to a further evaluation at step 3.36, wherein it is
 30 determined whether or not the size of the detected display object is specified. If this is the case, then processing proceeds to step 3.34 wherein the size is set as a parameter in the style attribute of each control type for the object. Again, processing then proceeds to step 3.50 where it ends, but may be repeated if there are further display objects to process.

Finally, if the evaluation at step 3.36 returns a negative, then a final evaluation at
 35 step 3.38 is performing to determine whether or not a value of a detected display object is

specified and if so then the specified value is set as parameters in the style attribute of each control type for the object at step 3.34. On the contrary, if no such value is specified then processing proceeds to step 3.40 wherein a default width and height of each control is retrieved from memory, which are then set as default values at step 3.34.

- 5 This algorithm therefore acts to determine for each display object within the tied web content size parameters such as the length of a text string, or the width and height of an image. This information may then be used in the adaptation process, to be described later.

- 10 Concerning the second task, a further algorithm is provided to perform this task, as described next.

First the algorithm to perform the second task pre-defines the function categories of single objects from a mark-up language perspective. A Single Object (O) is an element embedded in a mark-up language which carries properties of its own such as display styles, static or dynamic and structural styles.

- 15 We define the following pre-defined categories:

Information (I)

Information Title (T)

Control (C)

Decoration (D)

- 20 Replaceable Navigator (RN)

Un-replaceable Navigator (UN)

Replaceable Navigator Title (RNT)

Un-replaceable Navigator Title (UNT)

The definitions of these function categories are as follows:

- 25 Information (I) – an object that provides informative displayed content, which is important and cannot be replaceable. This object can be text, image, video, audio or any object (such as JAVA applet) file.

Information Title (T) – an object that describes the information object, which can be the text header or image with information properties.

- 30 Control (C) – an object that is meant for user interactive purposes, such as a button (radio or submit), input text area, form, drop down menu, check box, list box etc.

Decoration (D) – an object that does not play an informative role but is solely for improving the effect of visualization. This object can be image or text.

Replaceable Navigator (RN) – a Navigator is a URI link object. A Replaceable Navigator is a Navigator object that can be replaced by alternative text. It must be an image provided with alternative text.

- Un-replaceable Navigator (UN) – as mentioned, a Navigator is a URI link object.
- 5 An Un-replaceable Navigator is therefore a Navigator object that cannot be replaced by alternative text. It might be text or image without alternative text.

Replaceable Navigator Title (RNT) – A replaceable navigator title is the informative URI link object which describes a Navigator object. It can be replaced by alternative text. It must be an image provided with alternative text.

- 10 Un-replaceable Navigator Title (UNT) – This is an informative URI link object which describes a Navigator object. It cannot be replaced by alternative text. It might be text or image without alternative text.

- By providing such pre-defined function categories, the algorithm starts a scanning and comparing mechanism that analyses the properties of single objects embedded in a
- 15 mark-up language (such as HTML). The reasoning of the analysis is based on a decision tree (scanning and comparison logic sequence), as shown in Figure 4.

- The algorithm begins by scanning the web content mark-up language from top to bottom. When the scanning process starts, every single object of the mark-up language is searched, detected and compared with the pre-defined function categories. This comparing
- 20 process is carried out until end of the mark-up language.

Within the scanning loop, the algorithm searches for single objects and determines their function based on the properties carried by the object. The algorithm stops comparing the single object (O_n) properties and searches for the next single object (O_{n+1}) after the first single object O_n has qualified for a particular function category.

- 25 Referring to Figure 4, the decision tree process applied by the algorithm is as follows. The algorithm starts by first searching for a single object. Once a single object 40 has been detected, the algorithm then checks at step 4.2 as to whether the detected object has hyperlink properties embedded therein.

- If the object has hyperlink properties, then a check is performed at step 4.4 to
- 30 determine if the object is replaceable by finding whether there is any alternative text for the object. If there is alternative text and title properties for this object (as determined by step 4.6), then this object is categorised as a Replaceable Navigator Title (RNT) 48. Else if there is alternative text but no title properties for this object, then the algorithm categorises this object as a Replaceable Navigator (RN) 46.

If there is no alternative text and title properties for this object, then the algorithm categorises this object as an Un-replaceable Navigator Title (UNT) 52. Else if there is no alternative text and no title properties for this object, then the algorithm categorises this object as an Un-replaceable Navigator (URN) 50. This distinction is evaluated at step 4.16.

- 5 The title properties of RNT and UNT are based on the following conditions:

- It has title header properties; and
- It is a display object; and
- It must be URI hyperlink (image or text); and
- It has different styles compared to its adjacent display object.

- 10 After comparing the object with the hyperlink properties at step 4.2, 4.4, 4.6, and 4.16, if the object has not yet been categorised the invention will route the checking logic for non-hyperlink properties. User side interaction properties are the next to be compared. The factors that determine if the single object has user side interaction properties are if the single object is one of the following: button (radio or submit), input text area, form, drop
15 down menu, check box, or list box, and an evaluation to this effect is made at step 4.8

If the single object is detected at step 4.8 as having user side interaction properties, it will be categorized as a Control (C) 42. Else, the algorithm will further compare if it is an object which carries video, class object or audio properties, at step 4.10. If it is, then this single object will be included in the Information (I) function category 44.

- 20 If the object has still not been categorised, the algorithm further checks the single object by determining if there are decoration properties carried by the single object at step 4.12. The decoration properties are determined based on the following criteria:

The size of the single object - The size of the single object is derived from an experimental value which best represents the size of decoration properties; or

- 25 The presence of symbols, lines and separators between the present single object (On) and the next single object (On+1).

The object size (width & height) is based on experimental value (subjective value). The inventors performed experimental tests on 100 web pages, and our results showed that images with pixel sizes width ≤ 20 and height ≤ 20 tended to be a decoration object.

- 30 If the present single object qualifies from the above conditions, it will be categorized as a Decoration (D) function 54. If there are no decoration properties found within the single object, the invention will further check for information title properties, at step 4.14.

Once the single object is determined as not having decoration properties, it will be either categorized as Information function or Information Title function at step 4.14. The single object will only be qualified as Information Title (IT) 58 based on the following criteria:

- 5 It has title header properties; and
- It is a display object; and
- It might be text or image only; and
- It has different styles compare to its adjacent display object.

If the single object is determined not to have the title properties, it will be categorized as an Information (I) function 56.

- 10 Therefore, as will be apparent from the above, based on the scanning process and comparing mechanism done by this algorithm, all of the single objects in the tidied web content obtain an assigned specific function to represent their role within the mark-up language, thus fulfilling the second task performed by the content analysis module 20.

- Regarding the third task, a further algorithm is provided within the content analysis module to perform this task. The main purpose of this third algorithm is to group content into clusters based on their positioning information. Structural tags represent this information. The structural tags we recognize and select are:

- 20 <TABLE>, <FORM>, <FRAMESET>, <DIV>, , , <DL>, <P>, <PRE>, <ADDRESS>, <BLOCKQUOTE>, <Hn>, <HR>, <CENTER>, <MENU>, <DIR>, <TD> and <NOSCRIPT>;

which were selected for clustering objects because they are able to group objects together visually when the objects are displayed on client browsers.

- The operation of the algorithm which performs this task is simple, and merely acts to parse the web content and select objects for grouping on the basis of the presence of any of the above tags within the object.

25 With respect to the fourth task, i.e. that of matching the display object display patterns, and grouping them together to form a group, a pattern matching algorithm is provided, as described next.

- Web pages can be thought of as comprising of a number of content chunks. These chunks are sets of multimedia objects that relate to particular areas of interest or tasks. If a basic object is defined as one that contains a single multimedia element (for example an image or a body of text), and a composite object is defined as a set of objects (basic or composite) that perform some certain functions together, then a chunk is itself a high-level composite object. When a web-page is split up into a number of smaller pages it is important for the intelligibility that the content chunks are not broken up. Thus, before

35

adapting the content, the multimedia objects that make up the page need to be grouped into potential chunks.

- Yang and Zhang of Microsoft Research have described a system for locating such content chunks, in Yang, Y. and Zhang, H.J. "HTML Page Analysis Based on Visual Cues" in 6th International Conference on Document Analysis and Recognition (ICDAR2001), 2001. The following paragraphs outline a similar system. Both systems use the HTML tags to perform an initial grouping of multimedia objects into possible composite objects, followed by application of pattern matching to find possible further groupings. The difference between the systems lies in the distance measure used to determine the similarity of various objects and the algorithm for pattern matching.

Initial grouping of objects

- Before performing the initial grouping of multimedia objects into possible composite objects, the HTML document is parsed into an xHTML tree to clean up the HTML tags and to form an easy to manipulate structure. The xHTML tree consists of HTML tags at the nodes and multimedia objects at the leaves.

- The next step involves the construction of a group tree, in which the leaves contain multimedia objects and nodes denote composite objects (and so potential content chunks), up to the top node which denotes the entire web-page. The xHTML tree is transformed into a group tree, by first inserting `<g>` tags directly above a predefined set of HTML tags associated with the natural breaks in the content, mainly block level tags, such as `<table>`, `<td>`, `<form>`, `<center>` and `<h>`. Second, a set of tokens, one for each type of multimedia object is defined along with sets of attributes, for example, the number of characters in the text string, or the width and height of the image. Third, working from the multimedia objects at the leaves in the tree, the tokens are passed upwards and all nodes other than the leaf and those containing `<g>` tags are removed. As a token is passed upwards it accumulates attributes associated with the nodes, if a node has more than one child then all the children receive the attribute associated with it. Some formatting tags, such as `<tr>`, are ignored since they do not impose any attributes onto the multimedia elements and unlike the tags in the predefined set are not usually indicative of a new content chunk. If a `<g>` tag node has more than one child then the tokens arranged in a linear list in the same left-to-right order in which the child nodes are arranged.

- By labelling the objects associated with various block-level tags, such as tables and cells, as potential groups; the group tree already incorporates the majority of the composite objects and so content chunks. This technique assumes, not always correctly,

that the <g> tags do not split any content chunks. However, labelling the contents of formatting objects does not distinguish between content chunks which are implied through repeated arrangements of similar multimedia objects. Thus, once the group tree has been derived, pattern matching is performed on the list of tokens belonging to the child nodes of each <g> node.

Pattern Matching

The first step in the pattern matching process is determining which of the lists of tokens in each of the child nodes are similar. Note that each token has a set of attributes associated with it. Each attribute consists of a type and a value pair, for example (font, 14pt) and (width, 100). The values can either be strings or integers. If an attribute type does not naturally have a value associated with it then the value is set to a null string, for example (bold,). When comparing tokens, if a particular token does not have any attributes associated with it, then it is assigned a special null attribute (,) to ensure that the set of attributes is not empty.

To compare two tokens, α and β , with the sets of attributes: (T_i^α, V_i^α) , $i = 1, \dots, N^\alpha$ and (T_j^β, V_j^β) , $j = 1, \dots, N^\beta$ the following similarity measure is used

$$S(\alpha, \beta) = \left(\sum_{i=1}^{N^\alpha} (T_i^\alpha, V_i^\alpha)(T_i^\beta, V_i^\beta) + \sum_{j=1}^{N^\beta} (T_j^\beta, V_j^\beta)(T_j^\alpha, V_j^\alpha) \right) / (N^\alpha + N^\beta)$$

- where
- i) $(T_i^\alpha, V_i^\alpha)(T_j^\beta, V_j^\beta) = 1$ if $\exists 1 \leq j \leq N^\beta$ such that $T_i^\alpha = T_j^\beta$ and $V_i^\alpha = V_j^\beta$
 - ii) $(T_i^\alpha, V_i^\alpha)(T_j^\beta, V_j^\beta) = \min(V_i^\alpha, V_j^\beta) / \max(V_i^\alpha, V_j^\beta)$ if $\exists 1 \leq j \leq N^\beta$ such that $T_i^\alpha = T_j^\beta$ and both of V_i^α and V_j^β are integers
 - iii) $(T_i^\alpha, V_i^\alpha)(T_j^\beta, V_j^\beta) = 0$ otherwise.

Comparison of lists of tokens is achieved by dynamic time warping (a dynamic programming algorithm), see table 1 below, in which the alignment path is not allowed to wander more than a given number (proportional to the length of the smallest token) places off the diagonal and also incorporates a punishment for non-diagonal movements. If the sum of the similarity measures along the alignment path is greater than a threshold the two lists of tokens are regarded as similar since they are either identical or if there is only a little variation in their length and composition.

```

Public boolean Compare(ArrayList A, ArrayList B)
{
    float M[][] = new float[A.size()+1][B.size()+1];
    float Allow = 0.55 // acceptable average gain per token
5   float P = 0.3; // punishment for non-diagonal transitions
    for (x=1;x<=A.size();x++)
    {
        for (y=1;y<=B.size();y++)
        {
            if ((x-y)<=2 && (x-y)>=-2) // if with 2 of diagonal
10          M[x][y] = Max(M[x-1][y-1],M[x-1][y]-P,M[x][y-1]-P)
                + S(A.get(x-1),B.get(y-1));
        }
    }
15  if (M[A.size()][B.size()]>Min(A.size(),B.size())* Allow)
        return true;
    else return false;
}

```

Table 1. JAVA code for the comparison of lists of tokens.

20

To detect patterns, a lower triangular matrix, minus the diagonal elements, is first constructed detailing which of the child nodes (lists of tokens) are similar to one another. Next the significant token pattern, that is the repeated sequence of similar nodes that covers the largest number of child nodes, is found by examining all possible patterns. The significant token pattern denotes the start of each new group.

25 To prevent trivial significant token patterns emerging a number of constraints are applied, namely:

- The pattern must be at least two child nodes in length; and
- The pattern must be repeated at least twice; and
- 30 Instances of the same pattern should not overlap.

As these significant tokens denote the start of the groups (or content chunks), the groups are themselves extended by adding the following child-nodes into the groups whilst ensuring non-overlapping and reasonable similarity amongst the groups.

- The above concludes the four tasks performed by the content analysis module 20.
- 35 After these tasks, the system will have constructed an XML tree based on the retrieved web page content. This tree includes various additional information about the web content, and is now in a format suitable to be passed to the Adaptation Module. The information which has been provided by this process relate to:

- 40 i) Unbreakable groups which are not supposed to be separated during adaptation (i.e. the "chunks" referred to above);

ii) the functions of groups and single objects, which indicate whether they can be ignored or removed;

iii) the total display pixels and characters of the content source, which are used by the Adaptation module when deciding whether/how to split the content into smaller pages;

5 and

iv) The original structural and styling information of the content source. Here, structure means the layout of content. Structural information contains codes of how the content is arranged and positioned. Style means content objects' (such as text or image) width, height, colour, font attributes (e.g. font-face and size), etc.

10 The format of the XML tree which has been produced by this process is such that it now includes identifiers (known as <g> tags) which identify where it is allowable to split the content for display on separate web pages. Multiple <g> tags have been inserted, as discussed earlier, based both on natural breaks in the content (eg block level tags such as <table>, <td>, <form>, etc) and also based on appropriate groups of content which should be
15 displayed together. The hierarchical tree format means that these <g> tags form a number of nodes indicating where the tree may be split, and therefore the lowest <g> tags (ie those closest to the leaves) indicate those nodes below which no content splitting is allowed (ie unbreakable groups of content which cannot be spread over different web pages).

An additional aspect of the XML tree is that it includes a second type of identifier.

20 These identifiers are labels associated either with individual content objects (ie single multimedia elements such as an image or body of text) or composite objects (a set of objects which perform certain functions together). Those objects which are similar, for example of the same type and with similar lists of style attributes and other characteristics (such as image size or number of text characters) are labelled with the same identifier tag.
25 During the adaptation process (described later) these labels are used to ensure uniform treatment of similar objects when they are being processed for display on a web page (eg that all similar images / text boxes are reduced by the same proportion).

As mentioned, the Content Analysis module 20 now passes the results of the analysis (the XML tree) to the Adaptation module 16. The Adaptation module 16 then
30 retrieves all the client capability device profiles available (and which in this mode of operation were pre-generated) from the Profile Server 26. The Adaptation module 16 then triggers loops which run an algorithm to generate different versions of web content based on the profiles available. The number of loops performed will depend on the number of profiles available. Essentially, an adapted version of the content is generated for each client
35 capability profile.

The algorithms that operate on the XML tree to adapt the content are illustrated in the flow charts in Figures 5 and 6. Figure 5 shows the algorithm which checks whether the content will fit into the current profile range for the display device. This algorithm cycles through a number of stages, checking each time whether the content will fit the page (ie the display device), and if not then it performs a number of transformations to progressively reduce the size of the content. The algorithm of Figure 5 forms just one of the stages of the algorithm shown in Figure 6, which further operates to split the content onto different pages (if necessary).

Starting with the algorithm of Figure 6, the purpose of this is to ensure that if the content is too large for display on a single page on the intended display device, then it is split into multiple smaller pages, whilst minimizing the amount of white space on the pages. To perform the splitting, the algorithm uses the <g> tags in the XML tree structure. The algorithm operates by moving through the tree from node to node (the nodes tagged with a <g> label) starting from the top <g> node. At each node, the algorithm calculates whether the content in the sub-trees below it will fit the display, applying transformations to the multimedia objects (such as shrinking the font size / image size) as appropriate. If the content below the current <g> node will not fit the display, then the algorithm moves down to the child <g> nodes and recalculates for each of those (splitting them further if necessary) until the whole web page has been output as multiple smaller web pages.

In more detail, with reference to Figure 6, the steps carried out by the algorithm are as follows. Two temporary stores, stacks "Q" and "T", are used to temporarily store the nodes during processing. A third store, array "Trans", is used to store data relating to the transformations (such as reduction of the font size, or image size) which are to be applied to the various objects in the web page.

The adaptation algorithm commences at step S6.1. Firstly, the algorithm takes the top <g> node from the tree and puts it into stack Q (step S6.2). The algorithm also ensures that the temporary stack T is cleared (step S6.3). The algorithm then moves to step S6.4, which calls the function *fits_page(T,Trans)*, explained in more detail below, to check whether the <g> nodes currently stored in T will fit into the client display, and applies transformations to the multimedia objects as appropriate. However, since at this point the stack T is empty, *fits_page(T,Trans)* will return TRUE, and processing moves onto step S6.5, which is to check whether all the nodes in T have the same parent, using the function *are_siblings(T)*. Since T is also empty, this returns TRUE, moving processing onto step S6.6, which checks whether there are any nodes remaining in stack Q. Since there are nodes in Q (the top <g> node is currently in Q), processing moves onto step S6.7 which

moves the node from the top of stack Q onto stack T, and processing cycles back to step S6.4.

At this point, the top <g> node of the tree is in stack T, so step S6.4 checks using function *fits_page(T, Trans)* whether this node (ie the web content of all the sub-trees below it) fit into the client device display, including applying transformations to the objects as appropriate. This step involves the algorithm illustrated in Figure 5. At this stage, the algorithm is checking whether the entire web page content will fit into the display device (because the node currently stored in T is the top node). If the content is small enough to fit, the algorithm will terminate by passing through step S6.5 to step S6.6 since there are no nodes remaining in stack Q, the process jumps to step S6.15 where it outputs the entire tree (using a call to the function *render(T, Trans)*), and then ends.

However, when the entire web page content will not fit into the display device, then step S6.4 will be negative, and processing moves to step S6.8 which removes the top node from stack T and stores it as node N. Then, at step S6.9, there are still no nodes in stack T, so processing moves to step S6.10 which checks whether the node N is a leaf. At this stage, the answer is negative (because the node N is the top <g> node), so processing moves to step S6.11 which places all the direct child <g> nodes of node N onto stack Q for processing. Then, step S6.12 checks whether there are any nodes for processing in stack Q. At this stage, all the direct child <g> nodes of the top XML tree node are in stack Q, so processing cycles back to step S6.3 which clears the temporary stack T.

Processing then moves through steps S6.4, S6.5, S6.6 and S6.7 which moves the first of the direct child nodes from stack Q to stack T. It may be this portion of the web content (ie the content in the sub-trees below this child node) is small enough to fit into the client display (ie step S6.4 returns TRUE). In this case processing again passes through steps S6.4, S6.5, S6.6 and S6.7 to add the second child node from stack Q to stack T. This process will repeat indefinitely, checking each time whether this combined portion of the content (ie of all the nodes added to stack T) still fits within the client display. If at any point the source content (ie the current portion of content represented by the list of nodes in T) will not fit the display (ie step S6.4 is negative) then processing moves to step S6.8 where the last node added to stack T (ie the node highest on the stack) is removed from stack T and stored as node N. Step S6.9 then checks whether there are still nodes remaining on stack T, and, if yes, processing moves to step S6.13 where the node N is returned to the store it came from (ie stack Q) for processing later. Then a section of the XML tree (ie the content represented by the nodes currently in stack T) is output as one of the adapted smaller pages using a call to the function *render(T, Trans)*. The algorithm continues with

S6.12 determining whether there are still nodes remaining in stack Q for processing, and, if yes, moves to step S6.3.

Following the steps illustrated in Figure 6, the algorithm will iteratively work through the entire tree, transforming the content to see if it can be made to fit the display (ie in function *fits_page(T,Trans)*) and if not, then splitting the content even further. This is achieved in the algorithm by the process of: each time the content below a node does not fit into the display device then its direct child <g> nodes are separately added into a store (the queue in stack Q) in step S6.11 for processing later. This acts to split the content into smaller and smaller portions, so that the sub-trees can then be checked individually to see if the content is a suitable size for display on the client device. For any content portions that do fit the display, an attempt is then made to combine them with other portions of the content (ie step S6.7) so as to minimize the amount of white space in the display. However, this combining of different portions of the content is only made if the nodes in question are siblings (i.e. have the same parent <g> node in the tree). In this way, the adaptation algorithm works its way down through the entire tree, from the top <g> node to the bottom <g> node leaves (below which no further content splitting is allowed).

By virtue of hierarchical tree arrangement of the web content in the XML tree, and the order of the steps performed by the adaptation algorithm, the top-to-bottom, left-to-right order of the content is maintained when it is displayed. Also, it ensures that only whole and related composite objects (of the same level of grouping) are displayed on a single page.

In addition, the algorithm ensures consistency of display of similar objects throughout the smaller pages. It achieves this by the use of a store (eg the array called Trans) which maintains a list of transformations which have been applied to the objects, together with the object label associated with that object (ie the second type of identifier tag referred to earlier which indicates similar objects). For each portion of content, the algorithm checks array Trans to see if changes have already been applied to objects which were similar, so as to ensure that the transformations applied to these objects are consistent. The array Trans is dynamically updated during processing, each time the function *fits_page()* successfully applies new transformations to a portion of content that result in it fitting within the page size.

It is to be understood that throughout the description of the adaptation algorithm above, reference has been made to two stores, stacks "Q" and "T", used to temporarily store the nodes during processing. For the purposes of the function of the algorithm, such stores can therefore be considered to hold the relevant portions of content associated with those nodes. This is true notwithstanding the fact that the stores themselves may actually

be implemented simply as a list of memory addresses which point to the locations of the content in another part of the memory.

An exemplary embodiment of the adaptation algorithm (pseudo java code) for adapting the web page is given below:

```

5  splitPage(top_node)
   {
       Stack Q;           // Q is a stack which holds the nodes to be processed
       Stack T;           // T is a stack which holds nodes being processed
10  Node N;               // N is a temporary node
       ArrayList Trans;    // Trans is an array which holds the transformations applied to
                           // objects according to their object/group labelling

       Q.push(top_node)    // Add the top <g> node in the XML tree to stack Q
15  while (Q.size()>0)
       {
           while (!T.empty()) T.pop();    // Empty stack T

           while (fits_page(T,Trans) && are_siblings(T))
20             {
                 if (Q.size()==0) goto end;    // Finished XML tree
                 N=Q.pop();                    // Take the top node off stack Q...
                 T.push(N);                    // ...and add it onto stack T
             }

25             N=T.pop();                      // Remove top node from stack T and store it as node N

             if (T.size()>0)                  // Checks whether there are any nodes in stack T
             {
30                 Q.push(N);                  // node N is returned to stack Q for processing later
                 Trans=render(T,Trans);      // output a section of the XML page
             }
             else
             {
35                 if (is_leaf(N)) Trans=render(N,Trans); // If the current node N is a leaf
                                                           // then output a section of the XML page

                 else
                 {
40                     for each child C of N in reverse order
                       {Q.push(C);}              // Put all the direct child <g> nodes of N
                                                           // onto stack Q for processing
                 }
             }
         }
45  end: render(T,Trans);                      // output the last part of the XML page
   }

```

where the following functions are used by *SplitPage()*:

is_leaf(N)

5 This function returns TRUE if the temporary node N is a leaf

are_siblings(T)

This function returns TRUE if the nodes in stack T share the same parent <g> node (or T contains a single node or is empty)

10

fits_page(T,Trans)

This function determines whether the nodes in stack T (ie the content of all the subtrees below those nodes) are small enough to fit into the display device. Firstly, if stack T contains any nodes with identifier labels the same as those in Trans, then the associated transformations are applied to those objects. If the content now fits the page then *fits_page(T,Trans)* returns TRUE.

15 However, if the content does not yet fit the page, then a number of different transformations can be applied to the content, and these are illustrated in Figure 5. If any of these additional object transformations successfully result in the content fitting the display device then the transformations are added to the array Trans with the appropriate object labels, and *fits_page(T,Trans)* returns TRUE.

Alternatively, if the source content will still not fit the display device, even after all possible additional transformations have been applied, then *fits_page(T,Trans)* will return FALSE.

25 This function will also return TRUE if stack T is empty.

render(N,Trans), render(T,Trans)

This function is used to output a portion of the content (ie the content represented by one or more nodes of the XML tree) as one of the adapted smaller pages. The function either has input parameters of node N and array Trans, or stack T and array Trans. Since Trans contains the identifier labels for object which have been rendered to date, along with those transformations and parameters associated with them, then if N or T contains objects whose labels are the same as those in Trans, the relevant transformations are applied to those objects. The remaining objects are then transformed as appropriate (ie to fit the

intended display device whilst minimizing the white space), and the labels and transformations added to Trans. Finally Trans is returned by the function.

As mentioned earlier, during the function call *fits_page(T, Trans)*, if the content
 5 does not fit the profile range (eg the intended display device), then a number of different transformations can be applied to the content, and these are now discussed in more detail with reference to Figure 5. The algorithm which carries this out performs the following checks: i) Check if the total pixels and characters of the source content can be fit into the profile range;

10 ii) Check if after removing the blank spaces and lines, source content can be fit into the profile range; and

iii) Check if removing, resizing, summarizing, and changing properties of the display object will fit the source content into the profile.

These checks are embodied by 8 possible transformations. These transformations
 15 are applied in order, but after each transform has been applied an evaluation is performed to determined if the content as transformed up to that point can be displayed on the intended device, by referring to the client capability profile for that device. If it is determined that display is possible then no further transformations are applied, otherwise all 8 transformations are applied.

20 The available transformations, in order, are as follows:-

1st transformation: Font reduction. Here the original font is transformed into a smaller font size with "verdana" as the font-family.

2nd transformation: Image reduction. The purpose is to reduce image objects by 10% and goes into recursion until it reaches the optimum size or 50%.

25 3rd transformation: Control object reduction. The purpose is to reduce objects based on the ratio of default screen size and client device if the result is greater than an optimum size of the object.

4th transformation: Space removal. The purpose is to get rid of those unnecessary space between paragraphs.

30 5th transformation: Line removal. Its purpose is the same as the 4th transformation.

6th transformation: Decoration image removal. The purpose is to remove images which have decoration properties based on objects' size.

7th transformation: Decoration text removal. The purpose is to remove redundant texts which act as decoration if they are special characters.

8th transformation: Image replacement. If there is an alternate text for an image, then the algorithm will compare the alternate text size with the image itself. The shorter will be selected as the adapted result.

Figure 5 illustrates the transformation algorithm in more detail, and in particular 5 illustrates the eight different transforms which may be applied. Referring to Figure 5, the procedure provided thereby is started at step 5.1 wherein two counters are initialised. More particularly, a first counter i is initialised to $i=1$, and a second counter r is initialised to $r=0$.

Next, processing proceeds to step 5.2, wherein an evaluation is performed to 10 determine whether or not the web content will fit into the display of the intended display device. This evaluation is performed by comparing the characteristics of the content with the client device display capability characteristics as provided in the client capability profiles in the profile server 26. To generate a particular adapted version, at step 5.2 the evaluation is always performed against a single one of the client capability profiles, in respect of which an adapted version is being generated by the present instantiation of the 15 adaptation algorithm.

If the evaluation at step 5.2 indicates that the web content can fit into the display of the intended display device, and no transformation is required, then the transformation algorithm ends at step 5.3 and return TRUE for the function *fits_page()*.

On the contrary, if the evaluation at step 5.2 returns a negative, then processing 20 proceeds to step 5.4 wherein an evaluation is performed to determine as to whether the counter $i=1$. It will be recalled here that when the algorithm is first started at step 5.1 the counter i is initialised to one, and hence the evaluation at step 5.4 returns a positive, and processing proceeds to step 5.6. Here, the first transformation in the form of font reduction is started, which takes the forms of steps 5.8 and 5.10.

At step 5.8 the font size for all text in the web content to be adapted is set as 1, 25 although in other embodiment other values may be chosen. Next, at step 5.10 the font typeface for all text in the web content is set as "verdana". These steps have the result of drastically reducing the size of any text objects in the web content. Following the steps processing proceeds to step 5.12, wherein the counter i is incremented by one, and then 30 processing proceeds back to the evaluation at step 5.2 wherein an evaluation is performed to determine whether or not the transformed web content will now fit into the display of the intended display device. If this evaluation at step 5.2 returns a positive, i.e. the web content is now capable of being displayed on the intended display device, then the process proceeds to step 5.3 and ends. On the contrary, if further transformations are required then 35 processing proceeds to step 5.4, wherein an evaluation is made as to whether the counter i

is equal to one. Here, as the count i was incremented at step 5.12 and is now equal to two, a negative result is returned and hence processing proceeds to the evaluation at step 5.14, which evaluates whether the counter i is equal to two. Here a positive value will be returned, whereupon processing will proceed to step 5.16.

5 At step 5.16 an image reduction transformation is commenced. Within the image reduction transformation, first at step 5.18 a maximum possible reduction of the image is obtained. This is a hard coded value, for example 50%. Next, at step 5.20 an evaluation is made as to whether or not the maximum reduction value is greater than ten times the value of the counter r . It will be recalled here that at step 5.1 the value of the counter r was
10 initialised at to zero, and hence on the first recursion the evaluation of step 5.20 will return a positive value. Here processing proceeds to step 5.22, wherein images within the web content are reduced by 10%. Processing then proceeds to step 5.24 wherein the counter r is incremented by one, and from there to step 5.26 wherein an evaluation is made as to whether or not r is equal to 5. On the first recursion r will have been incremented at step
15 5.24 to take the value 1 only, and hence the evaluation of step 5.26 will return a negative value. In this case processing proceeds directly back to step 5.2, wherein the evaluation as to whether or not the transformed content will fit into the display of the intended display device is undertaken. If this is the case then processing ends at step 5.3 although if it is not the case then processing proceeds via step 5.4 to step 5.14, wherein, because i has not yet
20 been incremented again, a positive evaluation is returned, and the image reduction transformation of steps 5.18, 5.20, 5.22, 5.24 and 5.26 is applied once again.

It will be seen from Figure 5 that the image reduction transformation can be applied up to five times, and each time it is applied the images are further reduced in size by 10% for each recursion, or by the maximum reduction value available, in the event that the
25 maximum reduction available of the image is not greater than ten times the present value of r . In either event, however, the transformation is recursively applied five times, until the counter $r=5$. In this case, the evaluation of step 5.6 will then return a positive, whereupon processing will proceed to step 5.12, wherein the counter i is incremented. From step 5.12 processing always proceeds back to step 5.2, wherein the evaluation as to whether or not
30 the content will now fit into the display of the intended display device is undertaken. If the transformations already applied are sufficient, then this evaluation will return a positive value and processing will end at step 5.3. If the transformations already applied are not sufficient, however, and further transformations are required, then processing will proceed via step 5.4 and now also via step 5.15 (by virtue of i now being equal to 3) to step 5.30.

Here, an evaluation is made as to whether or not the counter i equals 3, and if so processing proceeds to step 5.32, wherein the control object reduction transformation is commenced by proceeding to step 5.34.

At step 5.34 a ratio is obtained of the default screen size for the web content, and
 5 the actual screen size of the intended display device. Based on this ratio, at step 5.36 a size of each control object is calculated based on the ratio, by applying the ratio to the default size. Then, at step 5.38 an evaluation is performed as to whether or not the calculated size for each control object is less than the minimum allowable size for each object, and if not processing proceeds to step 5.42 wherein the control object sizes can be
 10 reduced based on the calculated ratio. If, however, the calculated size is less than the allowable minimum size of each control object, then processing proceeds to step 5.40, wherein the size of the control objects in the web content is reduced based on the allowable minimum size. The allowable minimum size is predetermined in advance.

After either step 5.40 or step 5.42, processing proceeds to step 5.12 wherein the
 15 counter i is incremented, and thereafter to step 5.2 wherein the evaluation as to whether or not the transformed content will now fit into the display of the intended display device is performed.

Assuming the evaluation of step 5.2 returns a negative, the counter i is now equal to the value 4, and hence processing proceeds via step 5.4, step 5.14, and step 5.30, to
 20 step 5.44 wherein the evaluation that i equals 4 returns a positive value. This has the result of causing processing to proceed to step 5.46, wherein the space removal transformation is commenced.

This transformation relates to looking at object tags within the web content, and removing those objects which have particular tags and/or which meet other certain
 25 conditions. Therefore, at step 5.48, those objects which have tag `
` and which are the first child and the last child of objects with tags `<TD>` and `<DIV>` are removed. Next, at step 5.50, those objects with tag `
` and which are the sibling of objects with tag `<Table>` are also removed, and then, at step 5.52 any continuous blank spaces within the web content display objects are reduced to a single space, and correspondingly, at step 5.54 any
 30 continuous breaks within the web content display objects are reduced to one. Finally, at step 5.56 the cell padding, and cell spacing values of any `<table>` objects are reduced to zero. The result of the space removal transformation is to reduce blank space in the web content to an absolute minimum.

Following step 5.56 processing proceeds to step 5.12, wherein the counter i is
 35 incremented to 5. The evaluation at step 5.2 is then performed to determine whether or not

the transformed content will now fit into the display of the intended display device, and if so processing then ends at step 5.3. If not, however, processing would proceed via step 5.4, step 5.14, step 5.30 and step 5.44, to step 5.58, wherein the evaluation that i is equal to 5 would return a positive. Thereafter at step 5.60 the line removal transformation is applied, which acts at step 5.62 to remove all display objects with a <HR> tag. This has essentially the same function as the fourth transformation previously applied, i.e. to reduce blank space.

After step 5.62, processing proceeds to step 5.12 once again, wherein the counter i is incremented. The evaluation of step 5.2 is then performed once again, and assuming that it produces a negative result processing will proceed to step 5.64 via steps 5.4, 5.14, 5.30, 5.44, and 5.58. The evaluation at step 5.64 will result in a positive result, as i has been incremented to 6.

Therefore, following step 5.64 processing proceeds to step 5.66, wherein the decoration text removal transformation is commenced. This is performed at step 5.68, wherein text which had its function detected by the content analysis module 20 as being for decorative purposes is removed from the web content.

Following step 5.68 processing proceeds to step 5.12 wherein the counter i is incremented, and thereafter to the evaluation at step 5.2 as to whether or not the transformed content will now fit into the display of the intended display device. Assuming this is not the case, processing proceeds by the respective evaluations of steps 5.4, 5.14, 5.30, 5.44, 5.58, and 5.64 to step 5.70, and therein as the counter i now has a value of 7 a positive result is returned. This causes processing to proceed to step 5.72, wherein the decoration image removal transformation is commenced. At step 5.74 those images or objects whose function was detected by the content analysis module 20 as been decoration are removed. Thus images which do not contribute to the real semantic content of the web content are removed.

Following step 5.74, processing proceeds once again to step 5.12 wherein the counter i is incremented. Thereafter the evaluation at step 5.2 is performed as to whether or not the now transformed content will fit into the display of the intended display device, and assuming that this evaluation returns a negative value, processing proceeds via the respective evaluations of step 5.4, step 5.14, step 5.30, step 5.44, step 5.58, step 5.64, and step 5.70 to step 5.76, wherein an evaluation is performed as to whether i is now equal to 8. As this evaluation will return a positive result, processing proceeds to step 5.78 wherein the image replacement transformation is commenced. This starts at step 5.80, wherein, for each image display object an evaluation is performed as to whether or not the image has

alternative text. If this is the case, then processing proceeds to step 5.82 wherein a further evaluation is performed as to whether or not the total pixel size of the alternative text to the image is smaller than the image itself. Only if this is the case will the image be replaced with the alternative text. There is clearly little point in replacing an image with alternative text, if that text will take up more space than the image. Following the replacement at step 5.84 processing proceeds to step 5.12. Similarly, if either of the evaluations of step 5.80 or step 5.82 return a negative value i.e. an image does not have alternative text, or the alternative text is not smaller than the existing image size, then processing similarly proceeds to 5.12. It should be pointed out here that the image transformation depicted in Figure 5 is applied to each image in turn, before processing proceeds to step 5.12 and the counter *i* is incremented. Moreover, this processing of multiple objects in the web content applies to each of the transformations previously described, in that each transformation is applied to every relevant object in the web content before the counter *i* allowing the next transformation to be applied is incremented.

At step 5.12, once again the counter *i* is incremented, such that in this case it now takes the value 9. Therefore, when processing proceeds to the evaluation at step 5.2, the alternative condition of that evaluation that *i* is greater than 8 is now met, and hence the transformation algorithm must therefore end.

It will therefore be seen from the above description that the transformation algorithm acts to apply each transformation to the display objects in the web content in turn, and evaluate after the application of each transformation as to whether or not the transformed web content is capable of being displayed on the display of the intended display device. If this is the case then no further transformations are applied, and the function returns TRUE to *fits_page()*.

After the adaptation process is done, ie after the adaptation algorithm of Figure 6 has ended, a different version of web content will have been generated for a particular client capability profile. As there are a plurality of client capability profiles, however, the algorithms must be run repeatedly to generate an adapted web content version for each client capability profile. Following this (i.e. after all the versions have been created) the Adaptation module creates the profile ids for the versions created based on the client capability profiles, and stores the adapted versions and ids in the Content Cache. The logical relationship of the profile ids and physical adapted content is in the form of a database structure cross reference link. These versions of adapted content are then ready to be retrieved and delivered to an end user upon request.

Thus, in the above described mode of operation, the system according to the embodiment of the invention acts to generate multiple adapted versions of the original web content in advance of user requests therefor, each version being for a particular intended display device with known and specified characteristics.

- 5 As mentioned previously, however, the system may also operate in a web server capacity. This mode of operation will be described next.

Imagine that the system is acting as a web server and is connected to the Internet. The server receives an http request for web content from an end user device 1. That http request is first routed to the client capability discovery module 12, which acts to determine
10 the set of display characteristics of the end user device 1, such as, for example screen size, colour depth, browser type, network connection, etc.

The client capability discovery module detects device capabilities based on existing standards such as those put forward by M3I (please refer to Current Technologies for Device Independent, Mark H Butler, HP Labs Technical Report HPL-2001-83 4 April 2001,
15 referenced previously, the relevant contents of which necessary for a full understanding of the present invention being incorporated herein by reference). At the present time most internet browsers contain end-users' device information such as browser type and version, IP address, screen resolution etc in the initial request sent to the web server. An end-user's device will start communicating with the server when the end-user enters a URL through a
20 web browser. To get the end-user device information, client capability discovery module 12 uses a simple Javascript™ to retrieve the client capability information sent from the end-user's browser and passes the information to the server through a Java servlet program. There follows below a sample of the Javascript™ program which get and post end-user device information to the server through a Java® Servlet called "clientprofile":

25

```
<script language="JavaScript">
function getdeviceinfo() {
    document.formclient.pageUpdate.value = document.lastModified ;
    document.formclient.availHeight.value = screen.availHeight;
30 document.formclient.availWidth.value = screen.availWidth;
    document.formclient.bufferDepth.value = screen.bufferDepth;
    document.formclient.colorDepth.value = screen.colorDepth;
    document.formclient.fontSmoothingEnabled.value =
screen.fontSmoothingEnabled;
35 document.formclient.height.value = screen.height;
    document.formclient.width.value = screen.width;
    document.formclient.updateInterval.value = screen.updateInterval;

    document.formclient.javaEnabled.value = navigator.javaEnabled();
40 document.formclient.appName.value= navigator.appName;
    document.formclient.appVersion.value = navigator.appVersion;
```

```

document.formclient.cookieEnabled.value = navigator.cookieEnabled ;
document.formclient.cpuClass.value = navigator.cpuClass ;
document.formclient.mimeTypes.value = navigator.mimeTypes ;
document.formclient.appCodeName.value = navigator.appCodeName ;
5 document.formclient.platform.value = navigator.platform ;
document.formclient.opsProfile.value = navigator.opsProfile ;
document.formclient.plugins.value = navigator.plugins ;
document.formclient.systemLanguage.value = navigator.systemLanguage ;
document.formclient.userAgent.value = navigator.userAgent ;
10 document.formclient.userLanguage.value = navigator.userLanguage ;
document.formclient.userProfile.value = navigator.userProfile ;
document.formclient.action= "clientprofile";
document.formclient.submit();
}
15 </script>

```

Having determined the set of client characteristics of the end user device 1, the client capability discovery module 12 then passes the set of characteristics determined thereby to the decision module 14, which acts to compare the end user device characteristics with the set of client capability profiles stored in the profile server 26. If the decision module 14 can match the set of end user device characteristics with one of the client capability profiles, then the decision module accesses the content cache 10 which stores the different versions of adapted content using the profile ID of the client capability profile which matched to the end user device characteristics as an index thereto. The adapted version of the web content which is indexed to the profile ID of the matching client capability profile is then retrieved from the content cache 10, and supplied via the network to the end user device 1. Thus, in this mode of operation, the system is able to match end user device display characteristics with a set of predefined device characteristics, so as to determine the appropriate pregenerated adapted version of the web content to send to the end user device.

As previously mentioned above, the system also provides a further mode of operation, which combines the operations provided by the previously described modes. Here, when an end user device 1 makes a request for web content, as before the client capability discovery module 12 acts to determine the display characteristics thereof, which are then passed to the decision module 14. The decision module 14 then attempts to match the capabilities of the end user device 1 with the client capability stored in the profile server 26, and if a match is found then the appropriate adapted version of the web content is retrieved from the content cache 10, and passed to the end user device 1 over the network. If, however, no match can be made, then the decision module 14 acts to operate the adaptation module 16, by passing the details of the end user device 1 relating to the characteristics as determined by the client capability discovery module 12 to the adaptation

module 16. The adaptation module 16 then creates a new client capability profile which is stored in the profile server 26 corresponding to the capabilities of the end user device 1, and also starts its operation in exactly the same manner as previously described when pre-generating adapted versions of the web content, so as to create a new adapted version of the web content adapted specifically for the end user device 1. That is, the adaptation module 16 causes the content analysis module 20 to operate, which analyses the web content, allowing the adaptation module to run the adaptation algorithm so as to generate a new adapted version of the web content specifically for the end user device 1. The adapted web content is then fed back to the decision module, which forwards it over the network to the end user device 1. In addition the new adapted web content is also stored in the content cache 10 for future use by similar end user devices to the end user device 1, if required. Therefore, in this further mode, new versions of adapted web content can be created dynamically in response to a user request but are also then stored so as to be used to service future user requests if required.

In addition to the modes of operation described above, the system also provides the customisation module 24. This is merely a front end to allow web authors to browse the various adapted versions of the web content stored in the content cache, so as to make further refinements or improvements thereto if required. In view of this functionality, no further discussion of the customisation module 24 will be undertaken.

In conclusion, therefore, the system allows for different versions of web content to be created in advance of user requests therefor, such that user requests can then be serviced by matching the display characteristics of the end user device to the precreated versions, and hence allowing a response to be generated quickly, and with very little computing intensity. Additionally, if required, new versions of adapted web content can be dynamically created to match a specific end user device requesting the web content, and the dynamically created adapted web content is then also stored for later use in servicing future requests from similar end user devices.

Unless the context clearly requires otherwise, throughout the description and the claims, the words "comprise", "comprising" and the like are to be construed in an inclusive as opposed to an exclusive or exhaustive sense; that is to say, in the sense of "including, but not limited to".

It is understood that in the specific embodiment described herein, particularly with reference to the adaptation process of Figures 5 and 6, the procedure involved an iterative process which worked its way through the analysed web content (the XML tree), splitting

the content and transforming it as necessary to reduce it in size to fit the display device. However, an alternative embodiment is also envisaged in which the procedure would be modified so as to initially reduce the whole content down to its smallest possible size, before splitting the content and then transforming by rescaling upwards again to increase the size of the content to fit the display size. Upon rescaling the content upwards, it might then be necessary to re-split the content so as to better distribute it between pages. This procedure would therefore also involve iteratively splitting and transforming, but the step of determining whether the size of the content is suitable for display on the device might involve calculating whether an unacceptably large area of white space would be displayed on the device.

CLAIMS

1. An apparatus for adapting web page content for display on an intended display device, comprising adaptation means for splitting the content into a plurality of smaller web
5 pages for display on said device, the adaptation means being arranged in use to:
 - (i) split the content into a plurality of content portions, and to iteratively repeat steps (ii) to (vi) for at least one of the content portions:
 - (ii) analyse the content to determine whether the size of the content portion is suitable for display on said device;
 - 10 (iii) if the size of the content portion is not suitable for display on said device, then apply at least one content transformation to the content portion;
 - (iv) analyse the transformed content to determine whether the size of the transformed content portion is suitable for display on said device; and
 - (v) if the size of the transformed content portion is not suitable for display on said
15 device then split the content portion into a plurality of further content portions.
2. Apparatus according to claim 1, wherein analysis steps (ii) and (iv) to determine whether the size is suitable comprise determining whether the content is small enough for display on said device.
- 20 3. Apparatus according to claim 1 or 2, wherein the adaptation means is further arranged in use to:
 - in the event that step (iv) determines that the transformed content portion is small enough for display on said display device, then
 - 25 combine the transformed content portion with a further content portion to form a combined content portion;
4. Apparatus according to claim 3, wherein the adaptation means is further arranged in use to:
 - 30 analyse the content to determine whether the size of the combined content portion is suitable for display on said device, and if the size of the combined content portion is too large for said device then apply at least one content transformation to the combined content portion.

5. Apparatus according to claim 4 when dependent on claim 3, wherein the adaptation means comprising a store for content portions, and wherein said step of combining two content portions comprises selecting the further content portion from the store, the adaptation means being further arranged to:
- 5 analyse the content to determine whether the size of the transformed combined content portion is suitable for display on said device, and if the size of the transformed combined content portion is too large for said device then break up said combined content portion so as to return the further content portion back into said store.
- 10 6. Apparatus according to claim 5, wherein the adaptation means is further arranged to:
- if the size of the transformed combined content portion is small enough for display on said device then combine it with a second content portion.
- 15 7. Apparatus according to any preceding claim, further comprising analysis means arranged in use to translate the web page content into a hierarchical tree format comprising a plurality of nodes labelled so as to represent suitable locations for splitting the content into smaller web pages.
- 20 8. Apparatus according to any preceding claim, wherein the adaptation means further comprises a store for content portions, and wherein said steps of splitting content to form smaller content portions comprises adding a plurality of content portions into the store.
9. Apparatus according to any preceding claim, wherein the adaptation means
- 25 comprises:
- a transformations store for storing a record of transformations which have been applied to content together with an indication of the type of content those transformations have been applied to.
- 30 10. Apparatus according to claim 9 when dependent upon claim 3, wherein the step of combining the content portions as defined in claim 3 further comprises:
- applying content transformations according to the record of transformations to the further content portion so as to consistently apply transformations to the same type of content as indicated in the record of transformations.

11. A method for adapting web page content for display on an intended display device, comprising splitting the content into a plurality of smaller web pages for display on said device by performing the following steps:

(i) splitting the content into a plurality of content portions, and iteratively repeating
5 steps (ii) to (vi) for at least one of the content portions:

(ii) analysing the content to determine whether the size of the content portion is suitable for display on said device;

(iii) if the size of the content portion is not suitable for display on said device, then applying at least one content transformation to the content portion;

10 (iv) analysing the transformed content to determine whether the size of the transformed content portion is suitable for display on said device; and

(vi) if the size of the transformed content portion is not suitable for display on said device then splitting the content portion into a plurality of further content portions.

15 12. A method according to claim 11, wherein analysis steps (ii) and (iv) to determine whether the size is suitable comprise determining whether the content is small enough for display on said device.

13. A method according to claim 11 or 12, further comprising the step of:
20 in the event that step (iv) determines that the transformed content portion is small enough for display on said display device, then combining the transformed content portion with a further content portion to form a combined content portion;

25 14. A method according to claim 13, further comprising the steps of:
analysing the content to determine whether the size of the combined content portion is suitable for display on said device, and if the size of the combined content portion is too large for said device then applying at least one content transformation to the combined content portion.

30 15. A method according to 14 when dependent on claim 13, wherein said step of combining two content portions comprises selecting the further content portion from a store, and further comprising the steps of:

analysing the content to determine whether the size of the transformed combined
35 content portion is suitable for display on said device, and if the size of the transformed

combined content portion is too large for said device then breaking up said combined content portion and returning the further content portion back into said store.


16. A method according to claim 15, further comprising the step of:
 5 if the size of the transformed combined content portion is small enough for display on said device then combining it with a second content portion.
17. A method according to any of claims 11 to 16, further comprising the step of:
 translating the web page content into a hierarchical tree format comprising a plurality
 10 of nodes labelled so as to represent suitable locations for splitting the content into smaller web pages.
18. A method according to any of claims 11 to 17, wherein said steps of splitting content to form smaller content portions comprises adding a plurality of content portions into a store.
- 15 19. A method according to any of claims 11 to 18, further comprising:
 maintaining a record of transformations which have been applied to content together with an indication of the type of content those transformations have been applied to.
- 20 20. A method according to claim 19 when dependent upon claim 13, wherein the step of combining the content portions as defined in claim 3 further comprises:
 applying content transformations according to the record of transformations to the
 further content portion so as to consistently apply transformations to the same type of
 content as indicated in the record of transformations.
- 25 21. A computer program or suite of programs so arranged such that when executed by a computer system it/they cause/s the system to perform the method of any of claims 11 to 20.
- 30 22. A modulated carrier signal incorporating data corresponding to the computer program or at least one of the suite of programs of claim 21.
23. A computer readable storage medium storing a computer program or at least one of suite of computer programs according to claim 21.

ABSTRACT**Web Content Adaptation Process and System**

5 An apparatus and method for adapting web page content are described. The adaptation of
web page content for display on smaller intended display devices often requires the splitting
of the content over a number of smaller pages. The apparatus and method relate to a
procedure which integrates the process of splitting the content with applying transformations
10 (for example, reducing the font size, images, etc) so as to optimize this process. The
procedure is carried out systematically over the entire web page content, recursively
splitting the content into smaller and smaller portions whilst simultaneously alternating this
with various transformations so as to minimize the amount of white space visible on the
smaller pages. Additionally, the preferred embodiment also tracks the transformations which
15 have been applied to the objects and ensures consistency by applying them later to any
similar objects.

[Figure 6]

20

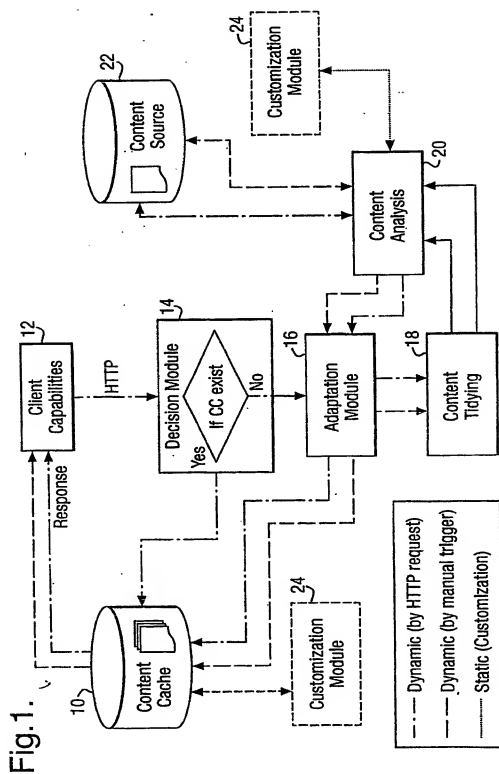

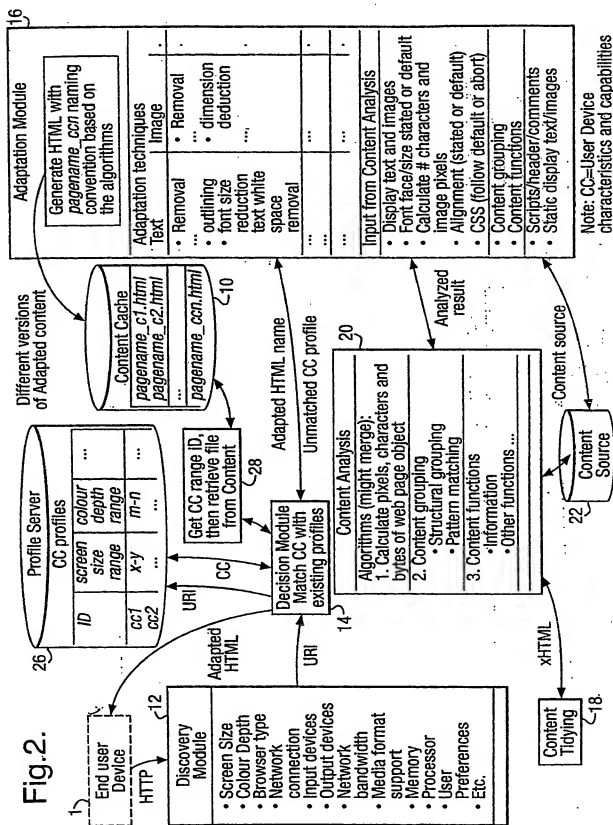


Fig. 3.

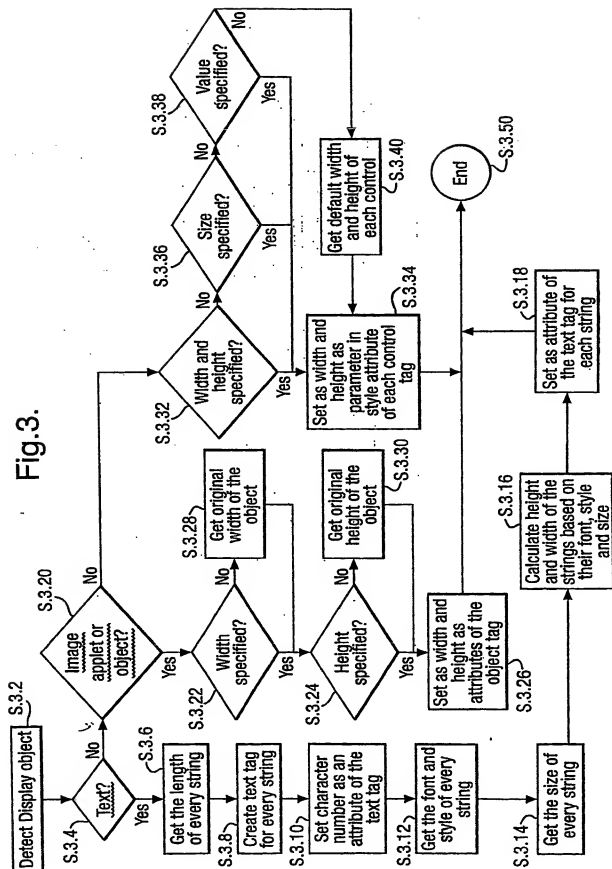


Fig. 4.

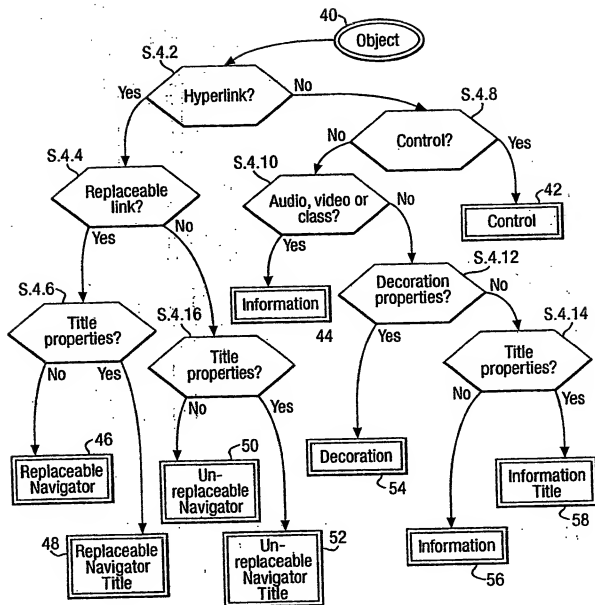


Fig. 5.

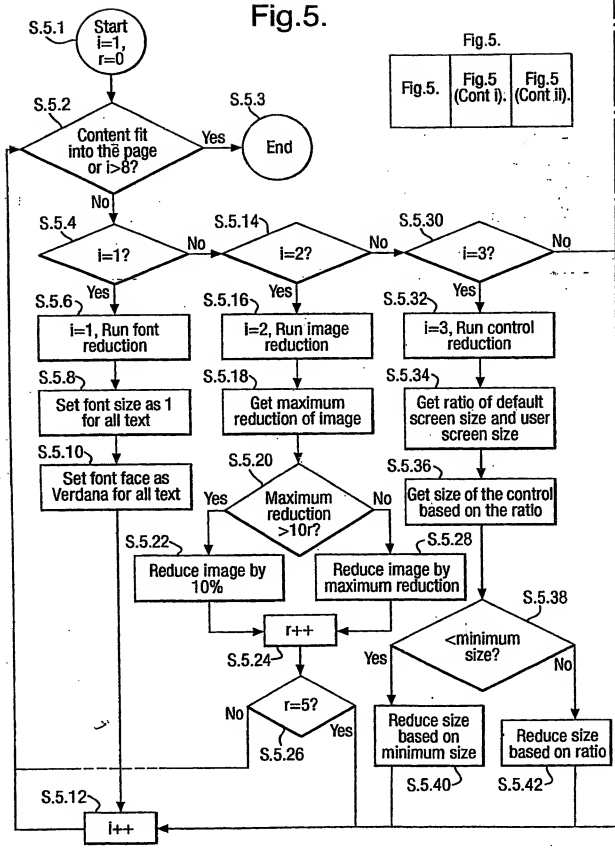


Fig.5 (Cont i).

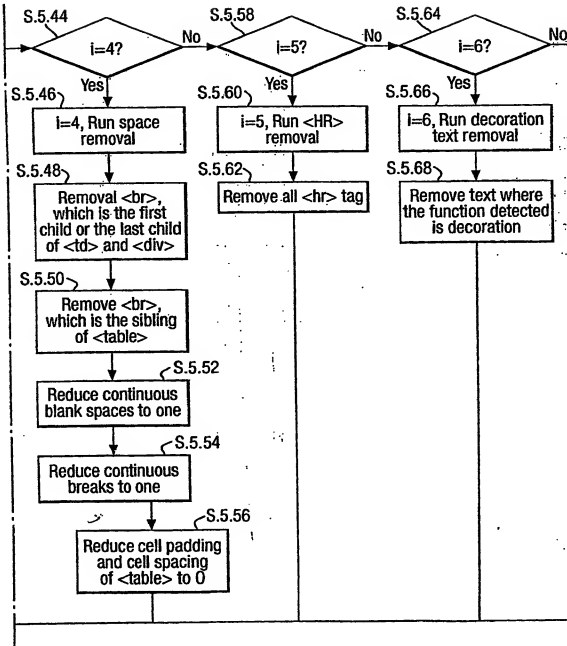


Fig.5 (Cont ii).


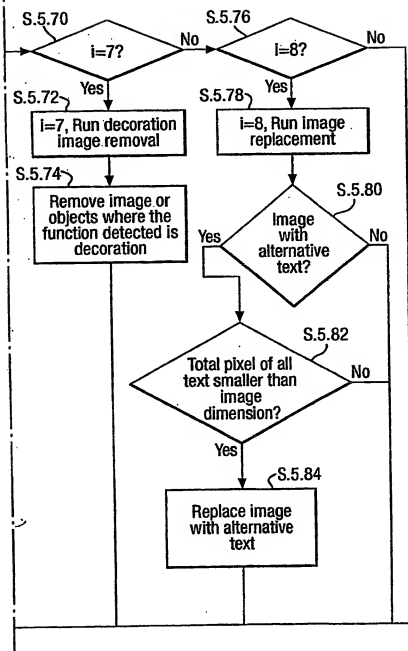


Fig. 6



178

PCT/GB2004/004151

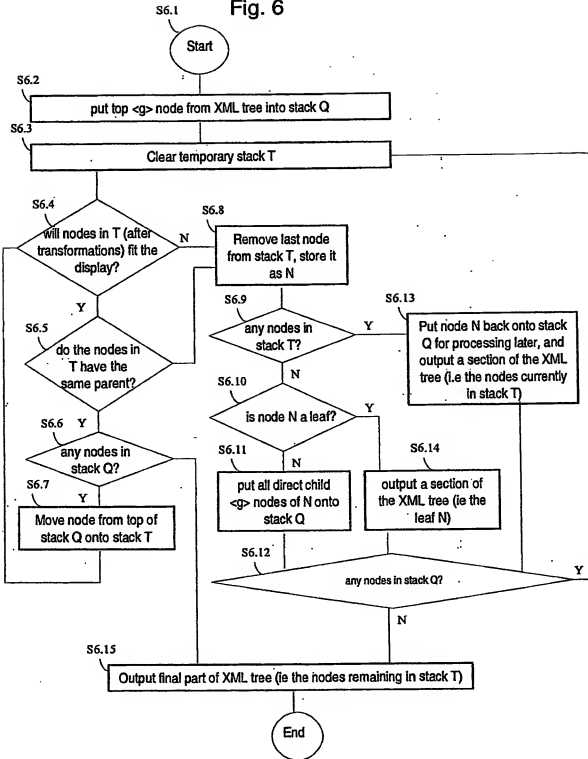

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☒ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.